



Ford Escape
2008-Present

Extender Installation Guide

Toyota Scion Xb (2008-Present) Extender Install Guide

Thank you for ordering brackets from ExtendMySeat, the automotive solution for more leg-room, more comfort and better driving.

Inventory in Box:

- | | |
|--------------------------------------|-----------------------------------|
| 2- ExtendMySeat black brackets | 2- Hex Nut 3/8-16 plus washer |
| 4- Black 3/8-16 x 3/4" grade 8 bolts | 2 – Rectangular Steel Flat Pieces |

What you will need for assembly:

- | | |
|--|--------------------------------------|
| 1- Socket wrench | 1- Metric 14 & Standard 9/16" socket |
| 1- Metric 17 Flat wrench (open end wrench) | 1- 2" & 4" Wrench extensions |
| 1- 1/2" Drill bit | 1- 3/4" Hole Saw |



Step 1- Remove the 2 ExtendMySeat brackets from the package and locate the 4 black 3/8" bolts, hex nuts and rectangular steel pieces.

Step 2- Use a socket wrench to remove the two factory bolts below the front drivers seat then slide your seat all the way forward.



Photos of Front Seat View

Step 3 - Move to the backseat and remove the two plastic guards. Locate and remove the two rear factory bolts.



Photo of Rear Seat View

Toyota Scion Xb (2008-Present) Extender Install Guide

Step 4 - Unplug the OEM seat plug under the front of the seat.



Step 5- Move your unsecured seat out of the vehicle.



Place the EMS brackets on the seat tracks to locate the drill location to make relief for the metal stud. You will need to drill a hole into your OEM seat rail so the metal stud can pass through. This will allow for the EMS brackets to secure correctly and flush. Once you drill the proper hole into the seat rail, you will be able to secure the EMS bracket to the seat chair.



Photo of Hole in OEM chair rail.

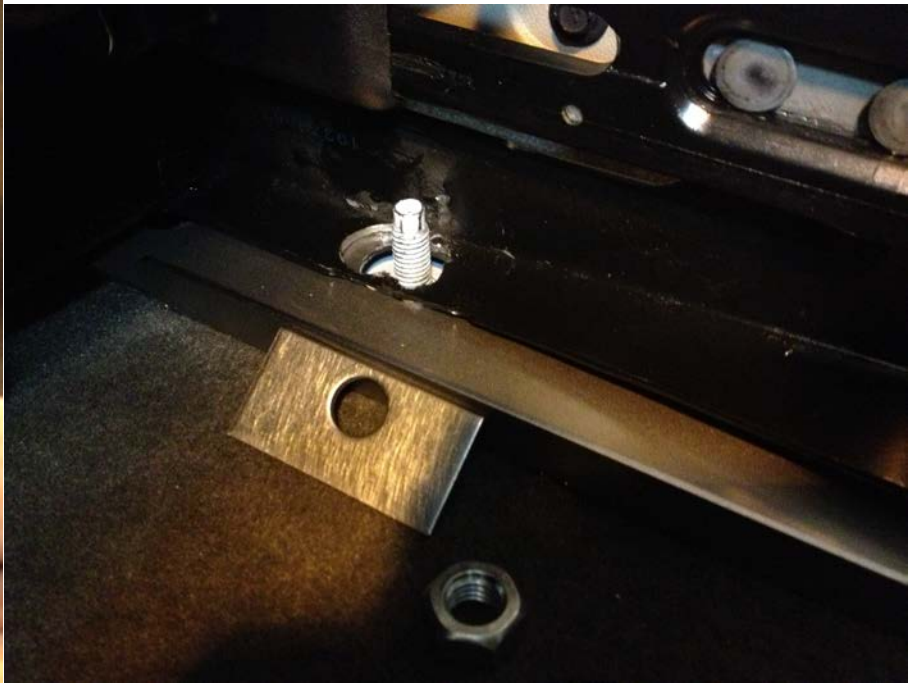



Photo of EMS bracket metal stud passing through bracket

Step 6 - Lay the 2 EMS brackets onto the floorboard.



Toyota Scion Xb (2008-Present) Extender Install Guide

Step 7 – Lay Seat chair onto EMS seat brackets starting with the rear. With stud passing through the newly drilled hole, place small EMS provided rectangular steel piece over stud and secure with provided nut.

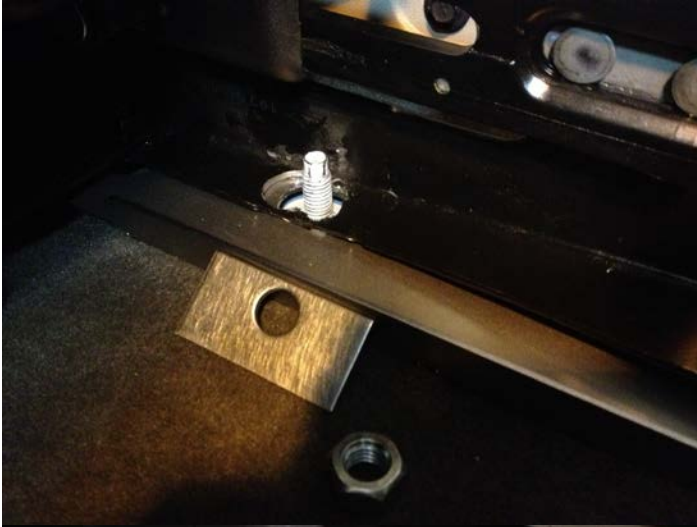

Step 8 – Secure the rear remaining hole locations with the provided EMS black bolts.



Step 9- Move to front of seat and secure the seat chair to the EMS brackets and then secure the EMS brackets to the OEM hole locations.



Toyota Scion Xb (2008-Present) Extender Install Guide

Step 10 – It might be necessary to cut the carpet by the wire harness to create room for the brackets to lay flat.



Step 11- Complete the installation by securing all eight bolts (four factory and four ExtendMySeat). Check to make sure all eight bolts are now tight and secure.

Step 12 – Reinstall 2 rear factory plastic guards

Step 13- Test seat by sliding it back and forth. You are now complete.