

## Thank You

Thank you for ordering brackets from ExtendMySeat, the automotive solution for more leg-room, more comfort and better driving.


## Inventory in Box:

- 4 - ExtendMySeat brackets
- 2 - 3/8 black bolts
- 2 - Conical washers
- 1 - Honda steel factory brake cable cover
- 2 - 3/8 hex nuts

## What you will need for assembly:

- 1 - Socket wrench
- 1 - Metric 14 socket
- 1 - Standard 9/16 socket
- 1 - Standard 7/16 socket
- 1 - Phillips head screw driver
- 1 - Metric 14 flat wrench
- 1 - 2" or 4" wrench extensions

## STEP 1

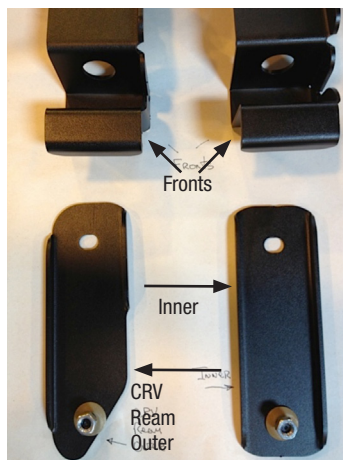

Aerial layout view: Front ExtendMySeat brackets are interchangeable inner and outer. Remove the four ExtendMySeat brackets from the package and locate the black 3/8 bolts provided.

## STEP 2



Remove factory plastic covers. (remove by pulling clockwise)

## STEP 3



Slide the seat to the rear, use your metric 14 socket to loosen and remove the two factory bolts below the front drivers seat. Once the bolts are removed, slide your seat forward.

## STEP 4



Move to the backseat and remove the two plastic guards then locate and remove the two rear factory bolts.

## STEP 5

Move your seat all the way back to lift the front of your seat up so you can slide one front ExtendMySeat bracket under the front of the seat rail, repeat this step with the inner bracket. Secure the factory seat to the ExtendMySeat brackets with the ExtendMySeat bolts. The front seat (inner and outer) will be secure to the ExtendMySeat brackets. Slightly tighten the ExtendMySeat brackets to the front factory locations to test (do not fully secure the factory bolts until later).

Note: you need to cut a small piece of the carpet in order to get the ExtendMySeat brackets to fit flush.



ExtendMySeat Front Outer View


## STEP 6



Go to the backseat of the car to install the two rear ExtendMySeat brackets. Pull back the carpet floor mat. In order to lay down the ExtendMySeat rear brackets you will need to cut the carpet straight back from the factory hole location about 5-6" on both the inner and outer locations. Once the seat is installed, the carpet cutouts will be covered (see below photos).



View from backseat showing carpet cutouts



View of six inch carpet cut

## STEP 6 cont.



Inner view

## STEP 7

View of factory brake cover once carpet is pulled back.



## STEP 7

This step is for the driver side only. Remove factory brake cable cover. There are two Phillip screws and one bolt that you will need to remove. You will not need your factory brake cover once you install the modified ExtendMySeat brake cover. Replace your brake cover with the ExtendMySeat cover provided.



## STEP 8



ExtendMySeat bracket secured

## STEP 8 cont.

Outer view of ExtendMySeat bracket. The ExtendMySeat brackets should clear the brake cable

Once the brake cover is replaced, lay down the two ExtendMySeat inner and outer rear brackets. The tapered ExtendMySeat rear bracket is used in the outer location and the non-tapered ExtendMySeat rear bracket installs on the inner rear location near the center of the vehicle. Passenger side rear brackets are interchangeable. Slightly tighten the brackets into the factory holes. Do not fully tighten the factory bolts until later.

## STEP 9

Secure the front and rear ExtendMySeat brackets to the factory hole locations using the factory bolts. Do not tighten the front factory bolts until the rear ExtendMySeat bolts have been secured.



## STEP 10

View from backseat (outer location) Use one of the black bolts.



## STEP 10 cont.

Slide the seat all the way forward to tighten the one ExtendMySeat bolt and one ExtendMySeat 3/8 nut/washer onto the two ExtendMySeat rear brackets. (All four ExtendMySeat fasteners should only be slightly tightened).



View of Inner ExtendMySeat bracket. Secure washer and nut.

## STEP 11

Complete the installation by securing the eight bolts (four factory and four ExtendMySeat). Check to make sure all eight bolts are now tight and secure. Lay removed carpet cutouts back in place and secure floormat.

## STEP 12

Re-install the four rear factory plastic guards.

## STEP 13

Test the seat by sliding it back and forth. You are complete.

## MORE INFORMATION

To view a video on installation, please visit [extendmyseat.com/install-guides/](http://extendmyseat.com/install-guides/)

**EXTENDMYSEAT.COM**  
3186-H Airway Avenue  
Costa Mesa, California 92626